


US-EWEIGH FLOOR SCALE



OUR SCALE GUARANTEE

- Easy to setup
- Easy to use
- Easy replacement parts
- Easy calibration/phone support
- Easy warranty support
- 30 day money back guarantee
- Lowest price guarantee

CALL NOW: 800-711-2237

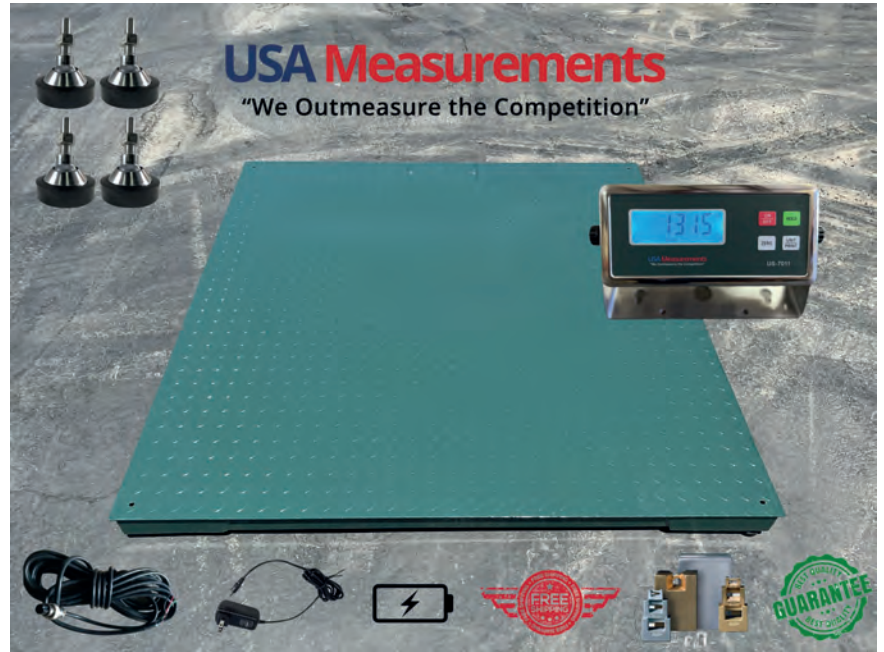

FEATURES

- Quality built platform scale for commercial use
- Low Profile Design with 3.5" to 4" overall Height
- Four Adjustable Leveling feet (Ball Swivel Type)
- Diamond Plated Steel Deck Construction
- Robust Steel Frame
- 20' long heavy duty cable for US-7011 Indicator
- Includes Digital LCD US-7011 indicator
- Built-in RS-232 communication port (Printer or PC)
- Arrives Factory Calibrated (PLUG & WEIGH)
- 200% Overload Protection

INDICATOR FEATURES

- US-7011 indicator with LCD display
- Metal Housing for US-7011 Indicator
- Includes AC Power Adapter
- Multiple weighing units: lb/oz/kg
- Gross/Tare/Zero
- Multiple Hold functions
- Connects to ticket printer or PC

SPECIFICATIONS

- Material: Diamond Plated Steel
- Military Green Powder Coating Finish
- Overload Protection: 200%
- IP Rating: IP65
- Indicator: US-7011
- Power: AC/DC or AA Batteries
- Cable Length: 20' long
- 2 year warranty on electronics
- 5 year warranty on steel frame

MODELS

US-EW2424 (2'X2' PLATFORM)

Capacity: 1,000 lb to 5,000 lb

US-EW3636 (3'X3' PLATFORM)

Capacity: 1,000 lb to 5,000 lb

US-EW4040 (40"X40" PLATFORM)

Capacity: 1,000 to 10,000 lb

US-EW4848 (4'X4' PLATFORM)

Capacity: 1,000 to 10,000 lb

US-EW4860 (4'X5' PLATFORM)

Capacity: 1,000 to 10,000 lb

US-EW4872 (4'X6' PLATFORM)

Capacity: 1,000 to 10,000 lb

US-EW4896 (4'X8' PLATFORM)

Capacity: 1,000 to 20,000 lb

US-EW6060 (5'X5' PLATFORM)

Capacity: 1,000 to 20,000 lb

US-EW6084 (5'X7' PLATFORM)


Capacity: 1,000 to 20,000 lb

US-EW7272 (6'X6' PLATFORM)

Capacity: 1,000 to 20,000 lb

US-EW8484 (7'X7' PLATFORM)

Capacity: 1,000 to 30,000 lb

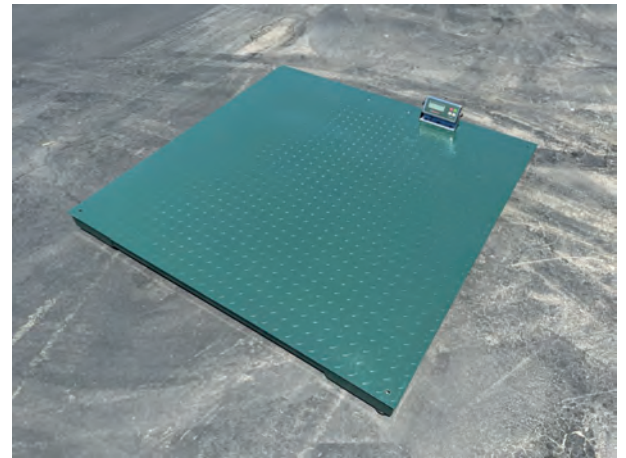

OPTIONAL ACCESSORIES

- Thermal Printer
- Label Printer
- Indoor Remote Display 3" Digits
- Indoor Remote Display 5" Digits
- Outdoor Remote Display 6" Digits
- Software
- Certificate of Calibration
- Intrinsically Safe Indicator
- Indicator with 4-20ma Output
- Indicator with Setpoint / Relay Function
- Wireless Transmitter