


US-LDL LOW LEVEL DRUM SCALE



FRED'S PERSONAL GUARANTEE

- Easy to setup
- Easy to use
- Easy replacement parts
- Easy calibration/phone support
- Long warranty support
- 30 day money back guarantee
- Lowest price guarantee

CALL NOW: 858-484-8000

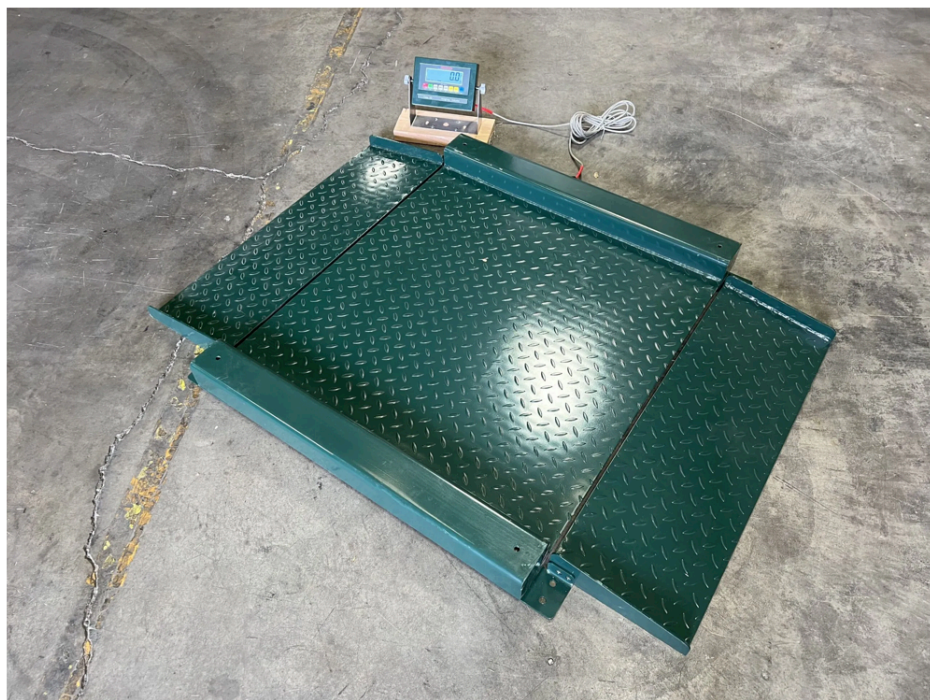

US-LDL "LOW LEVEL" DRUM SCALE

USA Measurements US-LDL "LOW LEVEL" floor scale. Designed with a platform height of 1.5". Making it very easy to roll on and off the scale. The scale has multiple weighing surfaces and live side rails. The US-LDL has capacities from 1K to 5K with 1 lb accuracy. Great for use with weighing drums, containers, portable applications, and use with dollies.


US-LD

MODEL NUMBER	CAPACITY (Dual range)	PLATFORM SIZE
US-LDL3030	1,000 lb to 5,000 lb	Carbon Steel Platform 30"x30"
US-LDL3636	1,000 lb to 5,000 lb	Carbon Steel Platform 36"x36"
US-LDL4848	1,000 lb to 5,000 lb	Carbon Steel Platform 48"x48"
US-LDL6060	1,000 lb to 5,000 lb	Carbon Steel Platform 60"x60"

US-LDL "The Little Drummer" floor scale is designed with a diamond plated steel deck, four shear beam load cells, and 200% overload protection. The scale features a 1/5" thick steel deck, 15' stainless steel braided cable, and four ball swivel feet. Our US-6011 digital indicator operates on AC power or rechargeable battery.

FEATURES:

- Different platform sizes
- Live Side Rails
- 4 Load Cell System
- Ball Swivel Leveling Feet
- Low Profile Design 1.5" H
- 200% Overload Protection
- 4" Integrated Scale Ramps
- 1,000 lb to 5,000 lb Capacity
- 0.2 lb to 1 lb Scale Accuracy
- 5 Year Warranty on Steel Frame
- 2 Year Warranty on Electronics
- NTEP Approved (Legal for trade)

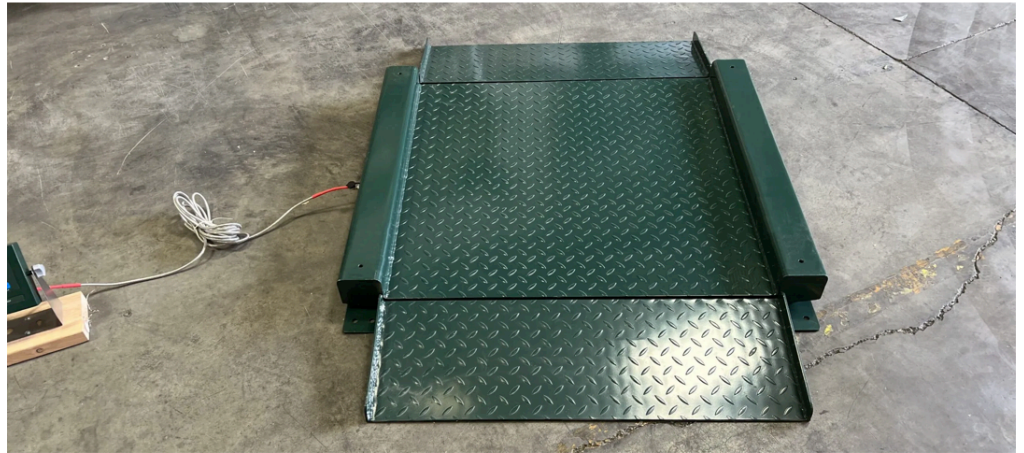

USA Measurements US-6011 LCD indicator is used in a variety of weighing applications. Such as livestock scales, recycling, ltl freight, and distilleries. Can be used on bench scales, floor scales, and pallet jack scales. The US-6011 indicator powers up to (4) 350 ohm load cells, has a built in LCD display, and rechargeable battery that last up to 100 hours. The easy to use indicator comes featured with the following functions: accumulation, percent weighing, checking weighing, and counting parts. Our US-6011 is user friendly and can be calibrated by any user.

US-6011 INDICATOR FEATURES:

- LCD Backlight Display
- 1" Digit Size
- Net, Total, Hold, Zero, & Accumulation
- Units: Lb, Kg, Ounces, Grams, LB:OZ
- Counting Function
- Rechargeable Battery
- 110V Power Adapter
- Animal Scale Function
- Check weigh (Hi/Ok/Lo)
- RS-232 Output
- Powers (4) 350 ohm Load Cells
- Dimensions: 9.5"x4.9"x2.5"
- Operating Temp: -10°C to 40°C (14°F to 104°F)

