

US-6011MS & US-6011SS DIGITAL INDICATOR NTEP APPROVED



OUR SCALE GUARANTEE

- Easy to setup
- Easy to use
- Easy replacement parts
- Easy calibration/phone support
- Easy warranty support
- 30 day money back guarantee
- Lowest price guarantee

CALL NOW: 800-711-2237

US-6011MS-LCD



US-6011MS-LED



USA Measurements
"We Outmeasure the Competition"



US-6011SS-LCD



US-6011SS-LED

INCLUDED WITH PURCHASE

- US-6011 Digital Indicator
- Rechargeable Battery
- Stainless Steel Mounting Bracket
- (2) Adjustable Knobs for Bracket
- Spare Connectors
- Plastic Splash Guard
- 15' Stainless Steel Braided Cable
- Power Adapter
- User Manual

INTERCHANGEABLE PRODUCTS

- MS-7510
- OP-900
- SL-7510
- SL-900
- LP-7510

MODELS

US-6011MS-LED

With Mild Steel (Red Digits) Units: lb or kg

US-6011SS-LED

With Stainless Steel (Red Digits) Units: lb or kg

US-6011MS-LCD


With Mild Steel (Black Digits) Units: lb, kg, oz, lb:oz, g

US-6011SS-LCD

With Stainless Steel (Black Digits) Units: lb, kg, oz, lb:oz, g

INDICATOR FEATURES

- Stainless Steel or Mild Steel Enclosure
- 1" Digit in LED or LCD
- Weighing Units LED: lb, kg
- Weighing Units: LCD lb, kg, oz, lb:oz, g
- Gross Weighing
- Multiple Tare Functions
- Pre-Set Tare Option
- Zero Button
- Multiple Hold Functions
- Counting Pieces Function
- Accumulation / Batch weighing
- Checking Weighing: Over/Under with alarm
- Power saving mode
- Automatic date and time update
- Modify gravity based on location
- 100% manual zero range setting
- Automatic error warning alarm
- Splash proof keyboard and display
- RS-232 Port for optional Scoreboard
- RS-232 Port for connecting to Printer
- Displays up to 50,000 graduations
- Includes Bracket & Mounting Hardware
- 110V Power Adapter Included
- Easy to Calibrate Indicator (5 Steps)
- Full Duplex RS-232 Serial Port
- Powers up to Six 350Ω load cells
- 2 year Manufacturer warranty
- NTEP approved for 5,000 divisions

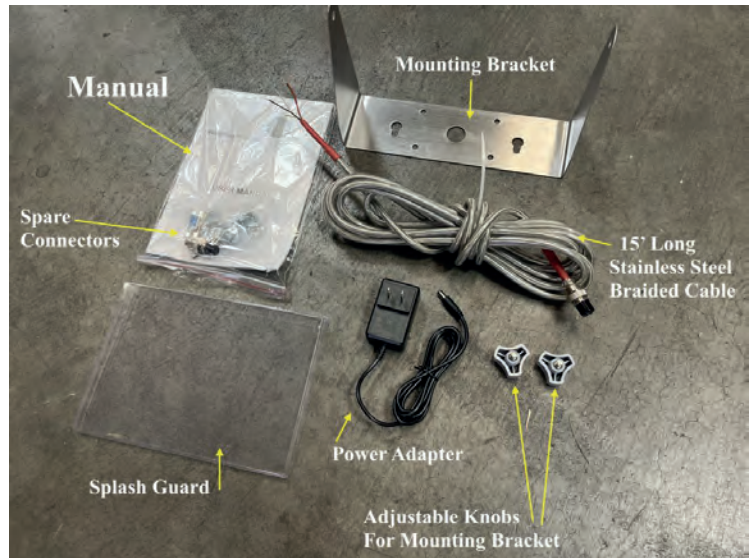

OPTIONAL ACCESSORIES

- Thermal Printer
- Label Printer
- Indoor Remote Display 3" Digits
- Indoor Remote Display 5" Digits
- Outdoor Remote Display 6" Digits
- Software
- Indicator Stand (stainless steel)
- Heavy Duty Indicator Stand
- Certificate of Calibration
- Intrinsically Safe Indicator
- Indicator with 4-20ma Output
- Indicator with Setpoint / Relay Function

